

HXW-6W

(Both 50Hz and 60Hz)

WRIST ALARM


AC 1kV to 42kV

Exclusively for cubicle works



■ Specifications

| | | |
|---|--------------------------------------|-----------------|
| Model | HXW-6W | |
| Working Voltage range | 1kV to 42kV | |
| Alarm starting distance (Under standard condition) | 60cm against 6.6kV (3.8kV to ground) | |
| Frequency | Both 50Hz and 60Hz | |
| Sound volume | 65dB or more (60cm apart) | |
| Battery | CR1620 (3V) × 1pcs | |
| Battery life (with new battery) | Continuously operating state | About 15 hr. |
| | Unused state | About 10 months |
| Operating temperature range | -10°C ~ +40°C | |

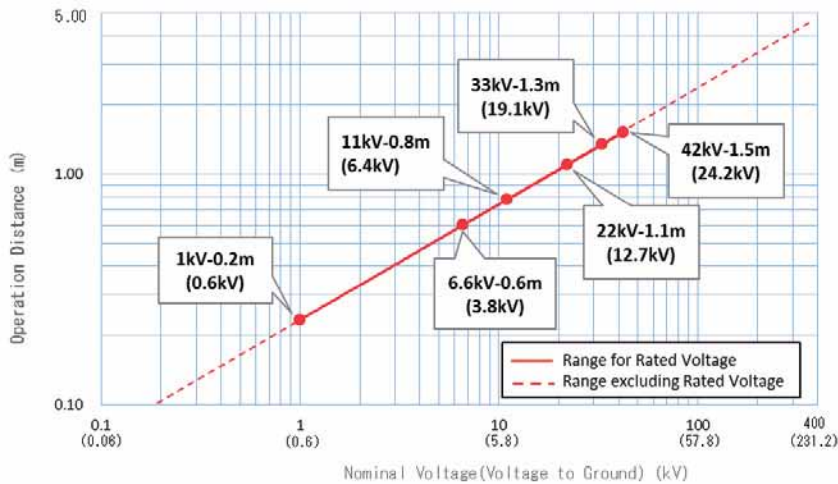

Operation Voltage Distance graph (Theoretical value)

■ Operation Voltage Distance Table (Theoretical value)

| Normal Voltage | Operation Distance |
|----------------|--------------------|
| 6.6kV | 0.6m |
| 11kV | 0.8m |
| 22kV | 1.1m |
| 33kV | 1.3m |

Operation Voltage-distance table and graph are theoretical value.

Operation distance is varied depending on the actual surrounding environment.

Please confirm operation distance in actual use environment before using.