


400 A connector accessories

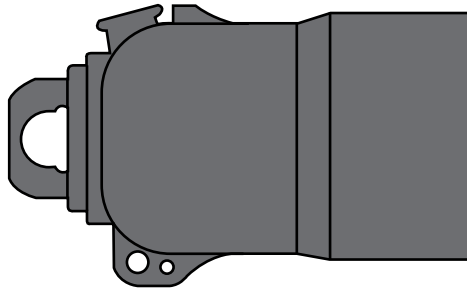


Plug-in receptacle cap

DRC400P - 24 kV applications

DRC436P - 36 kV applications

- Mates with 400 A plug-in interface B of CENELEC 50180 and 50181 and other major bushing standards
- Seals mating bushing to maintain electrical ratings, external screen, and watertightness
- Moulded EPDM insulation with semi-conductive EPDM external screen
- Supplied with silicone lubricant and installation instructions
- Bail assembly is ordered separately (2638409C01B)
- For de-energized operation

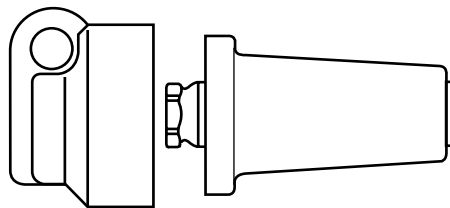


Basic insulating plug

DPI400 - 24 kV applications

DPI436 - 36 kV applications


- Moulded epoxy part to dead-end a 400 series tee connector.
- Contains an integral capacitive test point.
- Includes the semi-conductive EPDM rubber cap.
- Used with DT400P / 436P and DT400 / 436



**Pin contact & hex key for 400 A elbow
(DE400 / DE436)**

2638371C01B

- Tin-plated copper pin contact.
- Hex key applies the proper torque.

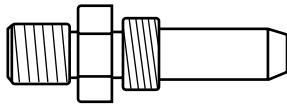


**Pin contact for plug-in tee connector
(DT400P / DT436P)**

2638325C01

- Tin-plated copper pin contact is installed with a 22 mm socket wrench.


Cable adapters

The CA 400 cable adapters are used on all 400 series products including the 400 A elbow, 400 A plug-in tee, and the 630 A bolted tee connector.

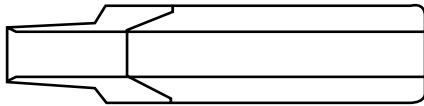

Catalog Number	Cable Information Range (mm)	
	Minimum	Maximum
CA400AA	13.5	17.2
CA400A	16.3	19.3
CA400B	18.3	21.0
CA400C	20.0	24.1
CA400D	23.1	27.0
CA400E	25.6	29.0
CA400F	27.7	32.6
CA400G	30.9	36.2
CA400H	34.0	39.5

Crimp connectors for 400 A elbow (DE400 / DE436)

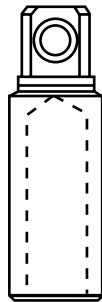

Conductor Size (mm ²)	DIN (Bimetallic)	EDF (Bimetallic)
25	CDE400U25	CDE400E25
35	CDE400U35	CDE400E35
50	CDE400U50	CDE400E50
70	CDE400U70	CDE400E70
95	CDE400U95	CDE400E95
120	CDE400U120	CDE400E120
150	CDE400U150	CDE400E150
185	CDE400U185	CDE400E185
240	CDE400U240	CDE400E240
300	CDE400U300	—
400	CDE400U400	—

Crimp connectors for 400 A plug-in tee (DT400P / DT436P)



Conductor Size (mm ²)	DIN (Bimetallic)	EDF (Bimetallic)
25	CDT400U25	CDT400E25
35	CDT400U35	CDT400E35
50	CDT400U50	CDT400E50
70	CDT400U70	CDT400E70
95	CDT400U95	CDT400E95
120	CDT400U120	CDT400E120
150	CDT400U150	CDT400E150
185	CDT400U185	CDT400E185
240	CDT400U240	CDT400E240
300	CDT400U300	—
400	CDT400U400	—

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Cooper Power Systems Division
2300 Badger Drive
Waukesha, WI 53188
Eaton.com/cooperpowerseries

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. CA650027EN

Eaton and Cooper Power are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use these trademarks without the prior written consent of Eaton.



Powering Business Worldwide