


- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Self-extinguishing (compliant with EN 60695-2-11)
- Low smoke and toxic gas emission (compliant with CEI-20-37/2-1 and CEI 20-37/7)
- Protection level: equivalent to IPX8 (CEI EN 60529) tested in water at a depth of one metre (IEC 50393 par. 8.6.3)
- Operating temperature: from -20 to +90 °C



SHARK® 125 PARALLEL

Gel insulated joint
for **single-core cable** parallel branch connections
U connector included

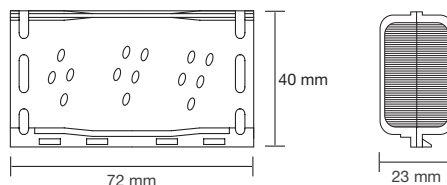

code SH0125

Applications


- Underground installation
- Overhead installation
- Installation in cable ducts

Kit contents

- Joint
- Brass connector
- Allen key for tightening the connections
- Cable ties
- Installation instructions


Advantages

- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- Branch joint **without interruption of the main cable**
- Excellent electrical insulation
- Good mechanical strength
- No expiry date
- **IMQ certificate of approval** no. CA01-00297
- **RINA certificate of approval** no. ELE 153611CS

APPLICATION TABLE				
Number of cores	Conductor cross section (mm ²)			
	min		max	
	main cable	branch cable	main cable	branch cable
	6	1.5	25 *	10 *

Cross sections measured using FG7 flexible cables

* NOTE: with 25 mm² main cable cross section, the maximum section of the branch cable is 6 mm²



Parallel branch connection for single-core cable