


SHARK®
GEL INSULATED JOINTS

SIZE
1

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Self-extinguishing (compliant with EN 60695-2-11)
- Low smoke and toxic gas emission (compliant with CEI-20-37/2-1 and CEI 20-37/7)
- Protection level: equivalent to IPX8 (CEI EN 60529) tested in water at a depth of one metre (IEC 50393 par. 8.6.3)
- Operating temperature: from -20 to +90 °C

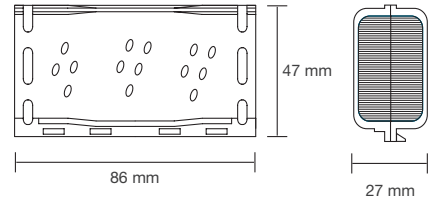

SHARK® 150 —●— STRAIGHT

Gel insulated joint for straight connection single-core cables - U connector included



code SH0150

Applications

- Underground installation
- Overhead installation
- Installation in cable ducts

Advantages

- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- Excellent electrical insulation
- Good mechanical strength
- No expiry date
- **IMQ certificate of approval no. CA01-00297**
- **RINA certificate of approval no. ELE 153611CS**


Kit contents

- Joint
- Brass connector
- Allen key for tightening the connections
- Cable ties
- Installation instructions


APPLICATION TABLE

Number of cores	Conductor cross-section (mm ²)	
	min	max
●	6	35

Cross-sections measured using FG7 flexible cables



Straight joint single-core cable

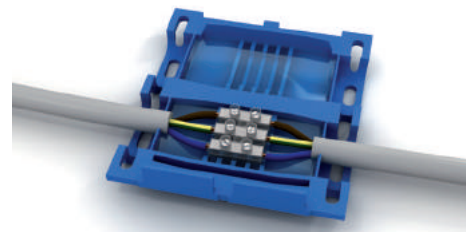

SHARK® 325 —●— STRAIGHT

Gel insulated joint for straight connection 3 core cables - 3 pole insulated terminal strip included



code SH0325

Applications

- Underground installation
- Overhead installation
- Installation in cable ducts

Advantages

- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- **Double insulation**
- Excellent electrical insulation
- Good mechanical strength
- No expiry date


Kit contents

- Joint
- 3 pole insulated terminal block compliant with standards DIN EN 60998 and CSA/UL, with VDE marking - Current 20 A
- Cable ties
- Installation instructions

APPLICATION TABLE

Number of cores	Conductor cross-section (mm ²)	
	min	max
●	2.5	10

Cross-sections measured using FG7 flexible cables



Straight 3 core cable joint