


SHARK®
GEL INSULATED JOINTS

SIZE
4

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Self-extinguishing (compliant with EN 60695-2-11)
- Low smoke and toxic gas emission (compliant with CEI-20-37/2-1 and CEI 20-37/7)
- Protection level: equivalent to IPX8 (CEI EN 60529) tested in water at a depth of one metre (IEC 50393 par. 8.6.3)
- Operating temperature: from -20 to +90 °C

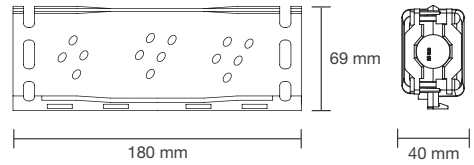

SHARK® 506WS —●— STRAIGHT

Gel insulated joint for straight connections cables up to 5 cores

5 pole insulated terminal block and cable strain relief system included



code SH0506WS

Applications

- Underground installation
- Overhead installation
- Installation in cable ducts

Advantages

- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- Excellent electrical insulation
- Double insulation ensured by the 5 pole insulated terminal block
- Good mechanical strength
- No expiry date

Kit contents


- Joint
- 5 pole insulated terminal block
- Allen key for tightening terminal block screws
- Cable strain relief system
- Cable ties
- Installation instructions

APPLICATION TABLE


Number of cores	Conductor cross-section (mm ²)	
	min	max
	95 *	240 *
	1.5	6

*Cross-sections measured using FG7 flexible cables * without using the terminal strip*

Maximum cable diameter: 28 mm



Straight joint five-core cable

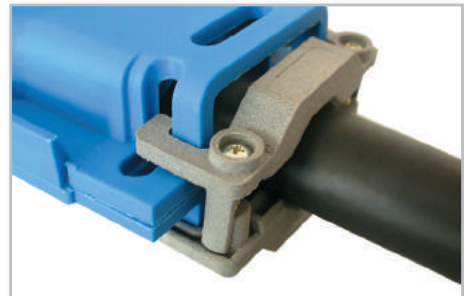

Cable strain relief system