


- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Self-extinguishing (compliant with EN 60695-2-11)
- Low smoke and toxic gas emission (compliant with CEI-20-37/2-1 and CEI 20-37/7)
- **IP68 protection level** (compliant with CEI EN 60529) tested to a depth of 10 metres with independent Intertek certification
- Double insulation
- Operating temperature: from -20 to 90 °C



# SHARK® 6801-B STRAIGHT

**IP68 gel insulated joint**  
for **3 core cables** straight connection  
3 pole insulated terminal strip included

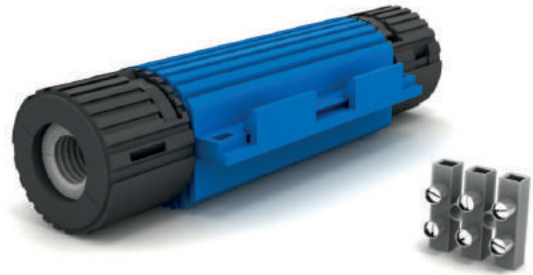

code SH6801B

## Applications


- Permanent installation under water
- Underground installation
- Overhead installation
- Installation in cable ducts
- Temporary Installations

## Advantages

- 100% waterproof
- 100% impenetrable
- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- Excellent electrical insulation
- Good mechanical strength
- No expiry date
- Non-hazardous product

## Kit contents

- Joint
- Joint locking and insulating collars
- 3 pole insulated terminal strip (compliant with standards DIN EN 60998 and CSA/UL, VDE marking - Current 20 A)
- Installation instructions

APPLICATION TABLE		
Number of cores	Conductor cross section (mm <sup>2</sup> )	
	min	max
	2.5	6

*Cross sections measured using FG7 flexible cables*



OFFICIALLY  
TESTED  
INTERTEK

**Intertek**