


SHARK®
GEL INSULATED JOINTS

SIZE
T1

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- **IMQ certificate of approval** no. CA00299
- **RINA certificate of approval** no. ELE 153611CS
- Self-extinguishing (compliant with EN 60695-2-11)
- Low smoke and toxic gas emission (compliant with CEI-20-37/2-1 and CEI 20-37/7)
- Protection level: equivalent to IPX8 (CEI EN 60529) tested in water at a depth of one metre (IEC 50393 par. 8.6.3)
- Operating temperature: from -20 to +90 °C

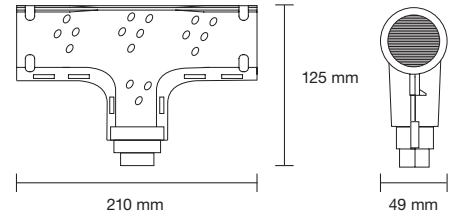

SHARK® 425 T BRANCH

Gel insulated joint for T branch connection cables up to 4 cores separators included



code SH0425

Applications

- Underground installation
- Overhead installation
- Installation in cable ducts
- Public lighting systems


Advantages

- Ready for use
- Re-enterable
- No pouring of resin
- Immediate operation
- The separators ensure that the cable is locked in the joint and allow the use of 4 uninsulated connectors with no need for offset installation
- Excellent electrical insulation
- Good mechanical strength
- No expiry date


Kit contents

- Joint
- Separators
- Cable ties
- Installation instructions

APPLICATION TABLE

max number of conductors	Conductor cross section (mm ²)			
	min		max	
	main cable	branch cable	main cable	branch cable
	6	1.5	25	16

Cross sections measured using FG7 flexible cables

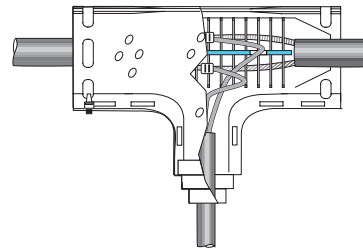

T branch connections on multicore cables.